
worldwideelectric.com
(800) 808-2131

Jet Pump - ODP
Fractional Horsepower Motors

- **Single and three-phase motors**
- **1/3 - 2 hp, 1ϕ at 115/230 Volts, 60Hz**
- **1/3 - 5 hp, 3ϕ at 230/460 Volts, 60Hz**
- **3600 rpm**
- **Frame sizes: 56 CB/JB**
- **Styles: CB/JB/CRD/JRD Options Available[1]**
- **Inverter rated 4:1 CT / 10:1 VT**
- **Meet NEMA Premium Efficiency Levels***

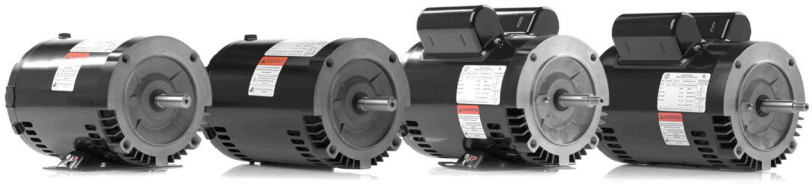

ODP Single-phase Specifications

- Capacitor start/capacitor run
- Automatic thermal overload protection
- Terminal board with spade connectors

ODP Three-phase

- Stud terminals for use with ring or fork terminals
- Pre-configured for 460 Volts. Supplied with terminal plug in terminal box for switching from 230 to 460 Volts.

Construction

- Open Drip Proof (ODP) enclosure
- Shaft up or down mounting
- C-face with removable base (CB/JB) and C-face round body footless (CRD/JRD)
- 56J-threaded shaft, ODE shaft supplied with slot for installation
- 56C-keyed shaft
- 304 stainless steel shaft end
- Drive-end shaft slinger
- Double shielded ball bearings
- Vacuum Pressure Impregnation (VPI) system
- Anti-rust film applied to rotor

Protection & Environmental

- IP23 protection
- Class F insulation

Applications

Versatile installation options offer a great way to simplify inventory. High torque and durable design make them ideal for residential and commercial water pumping applications.

1 Not all combinations of HP, frame and styles may be possible.
* Premium Efficiency in accordance with NEMA Table 12-12, 12-20, and 12-21

WORLDWIDE ELECTRIC CORPORATION

Responsive Service & Technical Support
In Stock Availability Nationwide Distribution
Quality Products Competitive Pricing
Fast Shipping Same-Day Available

Distribution Centers in Atlanta (GA), Dallas (TX), Hernando (MS), Indianapolis (IN), Milton (PA), Rancho Cucamonga (CA), Warrior (AL)

MEMBER EASA The Electro-Mechanical Authority
CEMA CONVEYOR EQUIPMENT MANUFACTURERS ASSOCIATION
PTDA Member