
worldwideelectric.com
(800) 808-2131

Open Drip Proof - Premium Efficient Motors

- **Three-phase, lightweight and compact**
- **1/2 - 300 hp**
- **1200, 1800, and 3600 rpm**
- **Frame Sizes: 56 - 449**
- **Styles: C/HZ/T/TS Options Available[1]**
- **200, 230/460 Volts at 60 Hz**
- **190/380 Volts, 50 Hz**
- **1.15 Service Factor**
- **Inverter duty, 10:1 CT / 20:1 VT (1.0 SF)**

ODP MOTORS

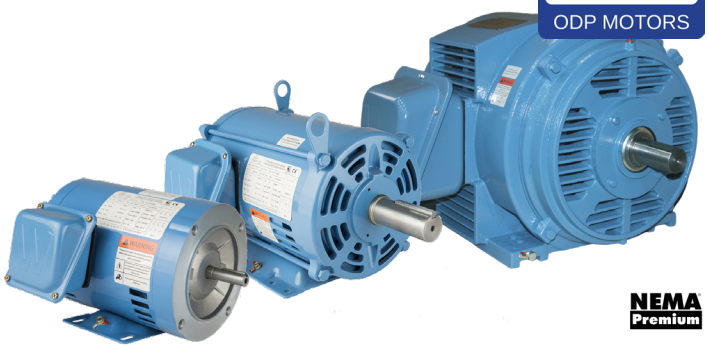

Model Options

- 56 Frame has C-face with removable base
- All 143T and up have double drilled feet and are pre-drilled and tapped to accept grounding rings
- 254T and larger are suitable for F1 to F2 conversion
- Rolled steel frame (56 - 324/6T)
- Cast iron frame (364/5T - 447/9T)
  - 60 - 300 hp, 3600 and 1800 rpm at 60 Hz
- 56HZ Frame rigid base in 3 hp, 1800 rpm
  - Mounting dimensions for 56, 143T, and 145T frames with 7/8" diameter shaft
- 200 Volt (143T - 326T)
  - 1 - 50 hp, 3600 and 1800 rpm at 60 Hz

Construction

- NEMA Design B
- Inverter grade magnet wire meets or exceeds NEMA MG - 1 Part 31
- Double Vacuum Pressure Impregnation (VPI) treatment
- Lifting eyes on larger models assist with installation
- Pre-tapped drive ends allow you to install a grounding ring outside the bell end

Protection & Environmental

- Class F insulation with Class B temperature rise
- IP23 protection

Applications

Ideal for use in HVAC and refrigeration equipment, air compressors, and general purpose installations where cooler-running, non-enclosed motors are required.



Accessories

See over for grounding rings and C-flange kits.

1 Not all combinations of HP, frame and styles may be possible.

WORLDWIDE ELECTRIC CORPORATION

Responsive
Service & Technical Support

In Stock Availability
Nationwide Distribution

Quality Products
Competitive Pricing

Fast Shipping
Same-Day Available

MEMBER EASA The Electro-Mechanical Authority
CEMA CONVEYOR EQUIPMENT MANUFACTURERS ASSOCIATION
PTDA Member