
worldwideelectric.com
(800) 808-2131

Stearns Double C-face Coupler Brakes


- **For standard NEMA C-Frame: 56C motor & quill input C-flange**
- **Suitable for Use with our full - line of Fractional hp Motors, including General Purpose, Stainless Steel, Permanent Magnet DC, and Farm Duty Motors.**
- **Two standard stock parts eliminate the need for specially designed brake motors for many applications.**

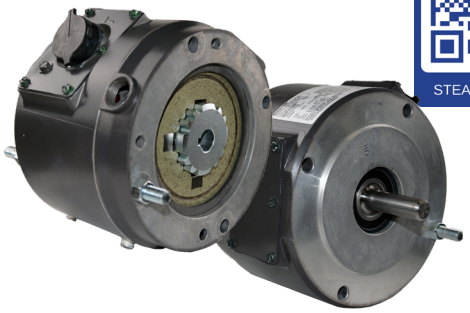

Product Features

- Self-adjusting
- Solenoid actuated brake (SAB)
- Torque lb-ft: 1.5, 3, 6, 10
- IP54 protection
- Manual release knob
- AC operated coil voltage: 115/230 (Vac 60 Hz), 230/460 (Vac 60 Hz)
- CSA Certified File LR6254
- RoHS3 compliant

Model Number	Description	Voltage	Max. Motor HP
S - 105670205 QF	1.5 lb - ft, 56C, IP54	230/460	1/3
S - 105671205 QF	3 lb - ft, 56C, IP54	230/460	1/2
S - 105672205 QF	6 lb - ft, 56C, IP54	230/460	1
S - 105673205 QF	10 lb - ft, 56C, IP54	230/460	2
S - 105670205 PF	1.5 lb - ft, 56C, IP54	115/230	1/3
S - 105671205 PF	3 lb - ft, 56C, IP54	115/230	1/2
S - 105672205 PF	6 lb - ft, 56C, IP54	115/230	1
S - 105673205 PF	10 lb - ft, 56C, IP54	115/230	2

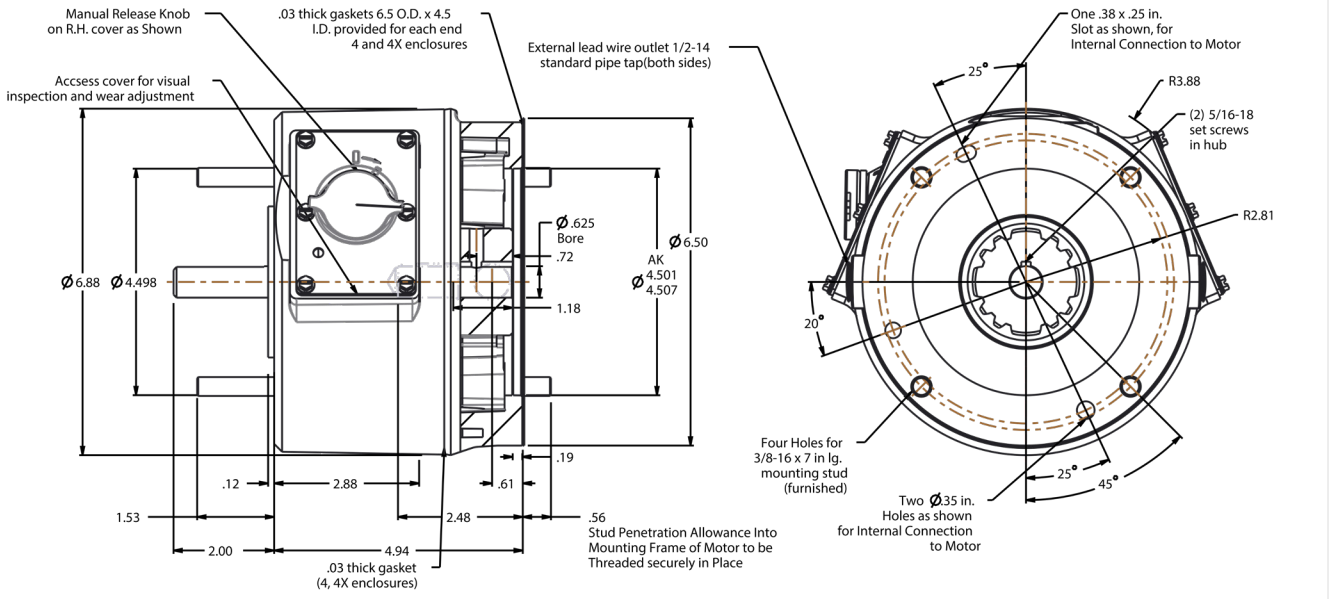

WORLDWIDE ELECTRIC CORPORATION

Responsive
Service & Technical Support

In Stock Availability
Nationwide Distribution

Quality Products
Competitive Pricing

Fast Shipping
Same-Day Available

Distribution Centers in Atlanta (GA), Dallas (TX), Hernando (MS), Indianapolis (IN), Milton (PA), Rancho Cucamonga (CA), Warrior (AL)

MEMBER EASA The Electro-Mechanical Authority
CEMA CONVEYOR EQUIPMENT MANUFACTURERS ASSOCIATION
PTDA Member