


Hydraulic Powered Shaft Mount Reducer

- Mounts directly to the driven shaft
- Dimensional drop-in for most major brands, including Dodge® Hydroil reducers
- Designed to accept all HXT™ compatible accessories without issue— take full advantage of your existing safety stock and support your installed base
- Box size: 3 - 5
- Speed ratio: 15:1 and 25:1
- Three-year warranty

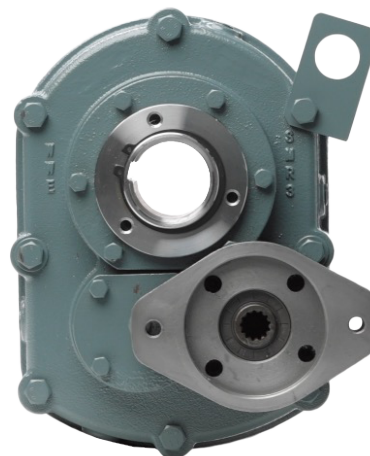


Construction

- Torque arm included.
- Accepts B30 hydraulic input motors.
- SAE B two bolt mounting.
- SAE B involute spline input 13 Teeth 13/32 DP.
- Heavy duty FCD45 cast iron housing for strength and reliability.
- Shaft and gears manufactured from high grade steel, case hardened and precision ground to A.G.M.A. standards.
- Extended gear centers and tooth contact.
- Metal reinforced, spring loaded, double-lip seals.
- Premium ball and tapered roller bearings.
- Tapered bushing type (Tapered Bushing Kit sold separately.)

Industrial Grade Accessories

- WorldWide Electric offers motor mounts, belt guards, tapered bushing kits and backstops* for WorldWide Shaft Mount Reducer which can also fit other TXT™ and HXT™ compatible series shaft mount reducers.

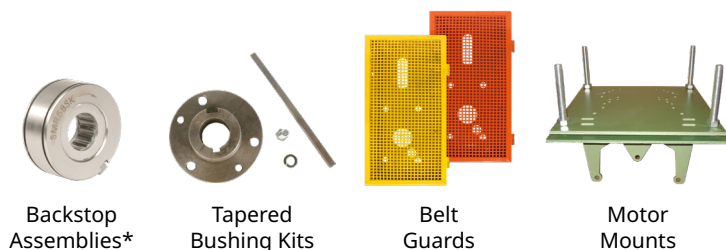

Model Number Selection†

Example: HYSMR3-15/1

Box Size	Ratio	Output Bore
3	15:1	2 ³ / ₁₆ "
	25:1	
4	15:1	2 ⁷ / ₁₆ "
	25:1	
5	15:1	2 ¹⁵ / ₁₆ "
	25:1	

† Not all combinations indicated by the table(s) may be possible.

* Suitable for use in WorldWide Electric shaft mount reducers only

Model Cross Reference

WWE	Dodge
HYSMR3-15/1	HXT315BT
HYSMR4-15/1	HXT415BT
HYSMR4-25/1	HXT425BT
HYSMR5-15/1	HXT515CT
HYSMR5-25/1	HXT525CT



295 Woodcliff Drive, Suite 3C
Fairport, NY 14450



Responsive
Service & Technical Support



In Stock Availability
Warehouses Nationwide



Quality Products
Competitive Pricing



Fast Shipping
Same-Day Available

Distribution Centers in Atlanta (GA), Dallas (TX), Hernando (MS), Indianapolis (IN), Milton (PA), Rancho Cucamonga (CA), Warrior (AL)

