

# The Original Shaft Mount Reducer

- Mounts directly to the driven shaft
- Dimensional drop-in for most major brands, including Dodge® TXT™
- Designed to accept all TXT™ compatible accessories without issue— take full advantage of your existing safety stock and support your installed base
- Box size: 2 - 12
- Speed ratio: 15:1 and 25:1
- Three-year warranty




MORE INFO  
SMR Series

## Construction

- Torque arm included.
- Heavy duty FCD45 cast iron housing for strength and reliability.
- Shaft and gears manufactured from high grade steel, case hardened and precision ground to A.G.M.A. standards.
- Extended gear centers and tooth contact.
- All shafts use metal reinforced double-lip seals to keep oil in and contaminants out.
- Premium tapered roller bearings and precision ground first stage gears for smoother, quieter operation.
- Tapered bushing type (Tapered Bushing Kit sold separately.)

## Industrial Grade Accessories

- WorldWide Electric offers motor mounts, belt guards, tapered bushing kits and backstops\* for WorldWide Shaft Mount Reducer which can also fit other TXT™ and HXT™ compatible series shaft mount reducers.

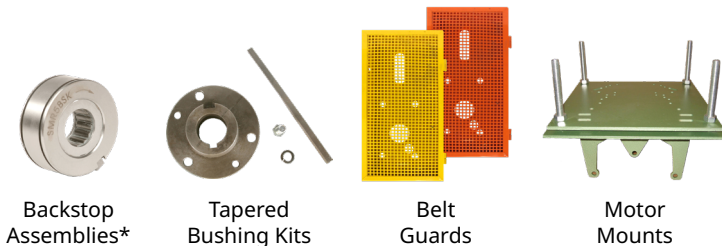

Backstop Assemblies\*

Tapered Bushing Kits

Belt Guards

Motor Mounts

## Model Number Selection†

Example: SMR3-15/1

| Box Size | Ratio | Output Bore                       |
|----------|-------|-----------------------------------|
| 2        | 15:1  | 1 <sup>15</sup> / <sub>16</sub> " |
|          | 25:1  |                                   |
| 3        | 15:1  | 2 <sup>3</sup> / <sub>16</sub> "  |
|          | 25:1  |                                   |
| 4        | 15:1  | 2 <sup>7</sup> / <sub>16</sub> "  |
|          | 25:1  |                                   |
| 5        | 15:1  | 2 <sup>15</sup> / <sub>16</sub> " |
|          | 25:1  |                                   |
| 6        | 15:1  | 3 <sup>7</sup> / <sub>16</sub> "  |
|          | 25:1  |                                   |
| 7        | 15:1  | 3 <sup>15</sup> / <sub>16</sub> " |
|          | 25:1  |                                   |
| 8        | 15:1  | 4 <sup>7</sup> / <sub>16</sub> "  |
|          | 25:1  |                                   |
| 9        | 15:1  | 4 <sup>15</sup> / <sub>16</sub> " |
|          | 25:1  |                                   |
| 10       | 15:1  | 5 <sup>7</sup> / <sub>16</sub> "  |
|          | 25:1  |                                   |
| 12       | 15:1  | 6 <sup>1</sup> / <sub>2</sub> "   |
|          | 25:1  |                                   |

† Not all combinations indicated by the table(s) may be possible.

\* Suitable for use in WorldWide Electric shaft mount reducers only



**Responsive**  
Service & Technical Support



**In Stock Availability**  
Warehouses Nationwide



**Quality Products**  
Competitive Pricing



**Fast Shipping**  
Same-Day Available

**Distribution Centers in** Atlanta (GA), Dallas (TX), Hernando (MS), Indianapolis (IN), Milton (PA), Rancho Cucamonga (CA), Warrior (AL)

